

5"×1.25" TPR Thermoplastic Rubber Wheel - Swivel Top Caster with Wheel Brake- 325 lbs Capacity

PART NO. 330PS-125032ANB-92GF-STA
 SKU 6912503003




DESCRIPTION

330 Series performance TPR (Thermoplastic Rubber) or TPE (Thermal Plastic Elastomer) wheel caster is specially engineered to provide unsurpassed durability and reliability. Non-marking thermoplastic elastomer flat tread is permanently bonded to a ribbed polyolefin wheel core. WandaTool TPR wheel offers the advantages of both hard and soft tread materials in a single wheel. Like a hard tread wheel, TPR wheel rolls easily and is very durable. Like a soft tread wheel, it rolls quietly, protects floors and resists impacts with a cushion ride. Absorbs shock to help protect equipment.

FEATURES

- Temperature Range: -20°C to 50°C. (-40°C to 82°C intermittent service)
- Maximum weather-ability and resistance to chemicals, water and steam
- Rejects floor debris, such as metal shavings, for long service life

DIMENSIONS mm [inch]

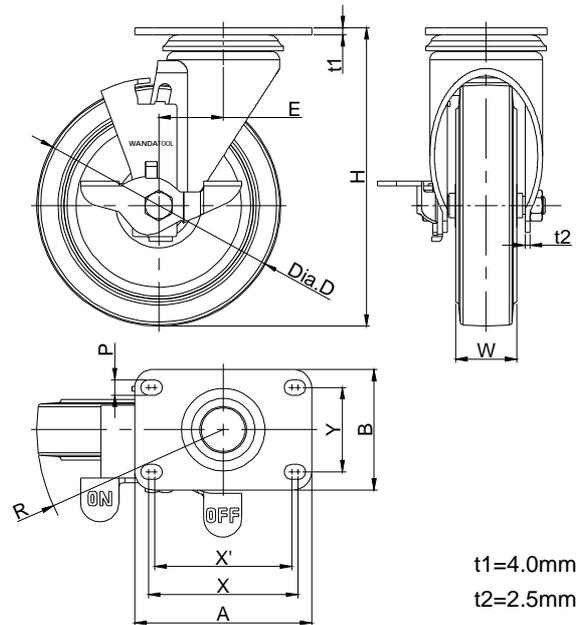

TECHNICAL DATA

TECHNICAL	°C / mm / kg	°F / inch / lbs
Wheel Diameter (D)	126mm	5 inch
Width of Tread (W)	32mm	1¼ inch
Wheel Type	Grey TPR rubber on PP core wheel (Flat)	
Hardness of Tread	65 to 75+/-5 Shore A	
Wheel Bearing	Annular ball bearing	
Caster Brake	Side brake, top lock the wheel face	
Fitting Type	Top plate	
Plate Size (A×B)	93×63mm	3 ⁵ / ₈ "×2 ¹ / ₂ "
Hole Centers (X×Y - X'×Y')	78×45 - 70mm	3 ¹ / ₁₆ "×1 ³ / ₄ " - 2 ¹³ / ₁₆ inch
Plate Hole (P)	8.2mm	5/ ₁₆ "
Swivel Offset (E)	32mm	1 ⁵ / ₁₆ "
Swivel Radius (R)	96mm	3 ¹³ / ₁₆ "
Load Height (H)	156mm	6 ³ / ₁₆ inch
Load Capacity	147kg	325lbs
Caster Weight	1.2kg	2 ³ / ₄ lbs
Packing	CTN SIZE: 43.5×23×29.5 cm 30PCS/CTN	
Remark	ROHS	

SCANNING QR CODE FOR WANDATOOL PLEASE



ADVANTAGES AT A GLANCE

Roll performance	★	★	★	☆	☆
Movement noise	★	★	★	☆	☆
Attrition	★	★	★	★	☆
Corrosion resistance	★	★	★	☆	☆

FOR 5"×1.25" TPR CASTER, PLEASE CHECK

<https://www.wandatool.com/casters/5in-swivel-TPR-caster-330PS-125032ANB-92GF-STA.html>